

Rec'd PCT/PTO 22 MAR 2005



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

10/1528639  
**PRIORITY  
DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 23 JAN 2004

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

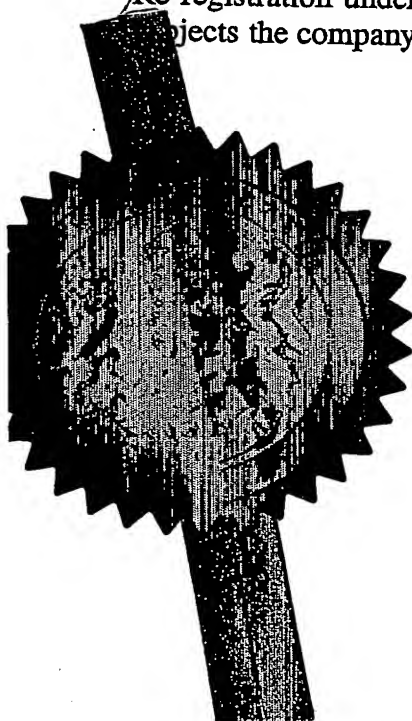


*P. Mahoney*

Signed

Dated 29 September 2003

**BEST AVAILABLE COPY**

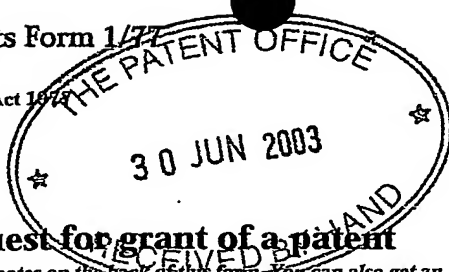

177  
03/03/2003 002840  
P017700 0.00-0315290.7

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

HL77286/002/CIV

2. Patent application number

(The Patent Office will fill in this part)

0315290.7

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Telefonaktiebolaget L M Ericsson (publ)  
SE-126 25 Stockholm  
Sweden

Patents ADP number (if you know it)

7844061001

If the applicant is a corporate body, give the country/state of its incorporation

SE

4. Title of the invention

POWER CONTROL IN TELECOMMUNICATIONS NETWORKS

5. Name of your agent (if you have one)

Haseltine Lake

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Imperial House  
15-19 Kingsway  
London  
WC2B 6UD

Patents ADP number (if you know it)

34001✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

GB  
US

0222073.9  
60/422,939

23/09/2002  
31/10/2002

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if

Yes

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d)).

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 8

Claim(s) 6

Abstract 1 DL

Drawing(s) 2-12

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1 ✓

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

Patents Form 23/77

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

27 June 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr C.I. Vigers

[0117] 910 3200

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

POWER CONTROL IN TELECOMMUNICATIONS NETWORKS

The present invention relates to power control in telecommunications networks, and, in particular, in RF mobile telephone networks and systems.

BACKGROUND OF THE INVENTION

Power control is important in mobile telephone networks, for example, because it is important to obtain desirably high capacity and efficiency, particularly in CDMA systems. The variable that is controlled is called quality. Quality of the communication is controlled with reference to a quality measure such as : BER (Bit Error Rate), FER (Frame Erasure Rate, BLER (Block Error Rate), number of iterations of a turbo decoder, or the average reliability of decision statistics. Below, for the sake of brevity, the quality measurement will be referred to as BLER. It will, however, be readily appreciated that BER or FER, or other quality measurement could be used.

Usually an integrating controller is provided to achieve a steady state performance with zero control error. The control scheme used is cascade control, see for example Figure 1 of the accompanying drawings. The idea with cascade control is to make an inner control loop (2) much faster than an outer control loop (4). For transmission power control (TPC) the inner loop controls another quality measure such as for example the signal to interference ratio (SIR). The outer loop sets the SIR reference value  $SIR_r$  for the inner loop. The goal of the outer loop is to control the SIR reference value to achieve a BLER that is equal to the BLER reference  $BLER_r$ . To get a control system that in steady state achieves a BLER that is equal to the BLER

reference, an integrating controller (9), which can be, for example, a PI controller, a PID controller, or a pure integrating controller, can be used. The cascade controller illustrated in Figure 1 comprises an inner control loop (2) and an outer control loop (4). Both control loops have an input of a received signal ( $y(k)$ ). In the outer control loop 4, the BLER is estimated in a BLER estimation unit(5) and compared with a BLER reference signal. A subtractor (7) calculates the difference between the reference signal and the BLER estimate to supply an input signal to an integrating controller (9). The integrating controller (9) produces a SIR reference signal.

The SIR reference signal is compared with an SIR estimate from an SIR estimation unit (3) in the inner control loop (2). The difference between the SIR reference and the SIR estimate is supplied to a function, for example a step function (11) for determining a command  $u(k)$  that sets transmission power. More generally, the SIR estimate and the SIR reference value could both be supplied to a function that determines a command  $u(k)$  for setting the transmission power.

A known problem with an integrating controller (such as a PI, PID, or pure integrating controller) is that it becomes unstable if the control signal saturates. This problem is often referred to as the windup problem. Transmission power control (TPC) saturation of the control signal corresponds to situations when the maximum (or minimum) transmitter power is used.

The windup problem in the power control algorithms for third generation mobile telephony systems is well known. The specific problem of windup protection in WCDMA makes several additions to anti-windup schemes

used in other areas necessary.

As is well known, integrating controllers have the nice property of being able to achieve zero control error in steady state. As an example of an integrating controller, a continuous time PI-controller is shown in Figure 2. Discrete time controllers have similar behaviour; see, for example, Karl Johan Åström and Tore Hägglund, "PID Controllers: Theory, Design and Tuning", Instrument Society of America, Research Triangle Park, NC, second edition, 1995.

A known problem with integrating controllers is that the integrator part turns unstable when the control signal saturates. This instability occurs because feedback from the process is needed to stabilize the controller, which is not open loop stable. In the case of transmission power control, saturation can occur when maximum (or minimum) transmission power is used. In this situation the transmission power can only be decreased (or increased in the case of a minimum), which can be seen as open loop operation of the integrator.

As the controller is not open loop stable the controller state (the integrator, I-part) can start to build up a large state. This usually results in that it takes a long time for the control loop to start functioning again after the saturation state is left. This problem is usually referred to as the windup problem.

#### SUMMARY OF THE PRESENT INVENTION

According to one aspect of the present invention there is provided a method for controlling a radio frequency

(RF) transmitter, the method comprising:

using an integrating controller to produce a

reference value of a first quality measure from a first error signal;

producing an estimated value of the first quality measure relating to an actual value of the first quality measure; and

supplying a tracking signal related to the estimated value of the first quality measure and the reference value of a first quality measure to the reference integrating controller.

According to another aspect of the present invention, there is provided a controller for controlling a radio frequency (RF) transmitter, the method comprising:

an integrating controller operable to produce a reference value of a first quality measure from a first error signal;

an estimator operable to produce an estimated value of the first quality measure relating to an actual value of the first quality measure; and

a tracking unit operable to supply a tracking signal related to the estimated value of the first quality measure and the reference value of a first quality measure to the reference integrating controller.

It is emphasised that the term "comprises" or "comprising" is used in this specification to specify the presence of stated features, integers, steps or components, but does not preclude the addition of one or more further features, integers, steps or components, or groups thereof.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a controller for a third generation mobile system;

Figure 2 illustrates an integrating controller;

and

Figure 3 illustrates a simplified model of a quality control process;

Figure 4 illustrates a controller according to an exemplary embodiment of the present invention; and

Figure 5 illustrates the PI controller of Figure 2 with a tracking signal input.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

To explain the present invention, a simplified model for the quality control process is illustrated in Figure 3. The SIR control loop is modelled as a saturation (21) and a delay (23).

The process that maps SIR to BLER is modelled as a static function (25). This is not important for the invention and can be modelled by any suitable means. A problem is that SIR and BLER cannot be directly measured. SIR and BLER can only be estimated. This is indicated in Figure 3 with two estimation noises  $v_k$  and  $w_k$ . BLER is usually estimated by evaluating the CRC flags of received blocks for a period of time.

In WCDMA systems, SIR is usually estimated by using so-called pilot symbols transmitted from the base station. Pilot symbols are predetermined symbols that are known to both the base station and the mobile terminal. By observing how the pilot symbols are received in the mobile terminal, the SIR can be estimated. The estimation is split in two parts, estimation of signal power, and estimation of interference power. The signal power is estimated by observing with what power the pilot symbols are received. The interference power is estimated by observing how large variation that is seen in the received pilot symbols. The estimated SIR is then calculated as the ratio of the signal power estimate



and the interference power estimate.

When transmission power saturates (i.e. when the maximum or minimum transmission power is used) the actual and estimated SIR will no longer follow  $SIR_r$  (SIR reference). In the tracking approach of the present invention the difference between the estimated SIR and  $SIR_r$  is calculated and fed back to stabilize the integrating controller. If  $v_k$  is small the difference will be small, except when the transmission power is saturated.

Figure 4 is a schematic illustration of a tracking solution according to an exemplary embodiment of the present invention. The components of Figure 3 are shown, namely the saturation (21), delay (23) and the static mapping function (25). A reference SIR ( $SIR_r$ ) is input to this model to produce an SIR estimate ( $SIR_{est}$ ) and a BLER estimate ( $BLER_{est}$ ).

A reference BLER ( $BLER_r$ ) is supplied via a log function (31) to a subtractor (33). Also supplied the subtractor (33) is the BLER estimate, via a log function (41), so that the subtractor (33) produces an error  $e$  in the desired quality measure, the error being equal to the difference between the reference BLER and the estimated BLER. The log functions are introduced to ensure that the control loop behaves in a linear fashion, and is not important for the invention.

The tracking solution is illustrated by elements (35), (37), and (39). A controller 35 (C-BLER) receives as one input the error signal  $e$ . The controller also receives a tracking signal  $e_s$ . The controller produces a signal representing the reference SIR for supply to the SIR control loop. The reference SIR signal is also supplied, via a delay element 37, to a subtractor 39 which produces the tracking signal by subtracting the delayed reference SIR signal  $SIR_r$  from

the estimated SIR signal  $SIR_{est}$ .

A PI-controller with tracking signal input to the integrator is shown in Figure 5. As before, a continuous time loop is shown, but a discrete time version is easily derived and would have similar behaviour.

Figure 5 illustrates an exemplary controller 35 in more detail. As can be seen, the controller includes a gain element 43 of gain  $K$  which receives an input  $e$  and supplies an output  $e*K$  to an adder 44. The error signal  $e$  is also supplied to a component 45 having a transfer function  $K/T_i$  (where  $T_i$  is the integration time) whose output is supplied to an adder 46. A second input of the adder 46 is provided by the output from a second component 49 having a transfer function  $1/T_t$  (where  $T_t$  is the tracking time) as supplied with the error signal  $e_s$ . The output of the adder 46 is integrated by the integrator 47 ( $1/s$ ) and supplied to the adder 44. The output of the adder 44 gives the reference SIR signal. It can be seen that the controller 35 provides the following transfer function as given in equation 1.

$$SIR_r = e * K + \frac{1}{s} \left( \frac{e * K}{T_i} + \frac{e_s}{T_t} \right) \quad (1)$$

An alternative implementation would be to use the estimated tracking signal  $e_s$  to do "conditional integration". In such an implementation the integrator part is not updated if  $e_s$  is larger than a threshold, i.e. if  $|e_s| > e_{threshold}$  the integrator is not updated. This solution also prevents the integrator state to build up a large value in scenarios of power saturation.

One exemplary implementation of the tracking arrangement includes to filter  $e_s$  and use a dead zone.

This makes the impact of estimation errors smaller in the case when power is not saturated. The classical implementation of a dead-zone is a block with the following function (input:  $u$ , output:  $y$ , dead-zone parameter:  $u_d$ ):

$$y = \begin{cases} u & \text{if } |u| \geq u_d \\ 0 & \text{if } |u| < u_d \end{cases} \quad (2)$$

The invention is a new application of the tracking approach to the windup problem. The major improvement compared to existing approaches are that the saturation is estimated by comparing  $SIR_r$  and  $SIR_{est}$  to produce a tracking signal  $e_s$ . The invention is applicable to transmission power control systems in both the up-link and the down-link.

CLAIMS

1. A method for controlling a radio frequency (RF) transmitter, the method comprising:

5 using an integrating controller to produce a reference value of a first quality measure from a first error signal;

10 producing an estimated value of the first quality measure relating to an actual value of the first quality measure; and

supplying a tracking signal related to the estimated value of the first quality measure and the reference value of a first quality measure to the integrating controller.

15 2. A method as claimed in claim 1, wherein the first error signal is based on a reference value of a second quality measure and an estimated value of the second quality measure.

20 3. A method as claimed in claim 2, wherein the first error signal is the difference between the reference value of the second quality measure and the estimated value of the second quality measure.

25 4. A method as claimed in any one of claims 1 to 3, wherein the second quality measure is one of block error rate (BLER), bit error rate (BER), frame error rate (FER), a number of iterations performed by a  
30 decoder, or a value based on reliability of decision statistics.

35 5. A method as claimed in claim 1, wherein the tracking signal is the difference between the reference value of the first quality measure and the estimated

value of the first quality measure.

6. A method as claimed in any one of the preceding claims, wherein the first quality measure is a signal to interference ratio (SIR).

7. A method as claimed in claim 1, wherein the integrating controller is one of a proportional integrating (PI) controller or a proportional integrating derivative (PID) controller.

8. A method as claimed in claim 7, wherein the PI controller has the transfer function:

$$SIR_r = e * K + \frac{1}{s} \left( \frac{e * K}{T_i} + \frac{e_t}{T_t} \right)$$

in which  $SIR_r$  is the reference value of the first quality measure,  $e$  is the error in quality measure,  $K$  is a constant,  $e_t$  is the tracking signal and  $T_i$  and  $T_t$  are time constants relating to the integration and tracking unit respectively.

9. A method as claimed in claim 2, wherein the reference value of the second quality measure is set to produce a desired actual value of the second quality measure of the received signal.

10. A method as claimed in claim 1, wherein the reference value of the first quality measure is set to produce a desired actual value of the first quality measure of the received signal.

11. A method as claimed in claim 1, wherein the reference value of the first quality measure is set to

produce a command indicative of a desired change in transmission power..

5 12. A method as claimed in claim 1, wherein the tracking signal is filtered before being supplied to the integrating controller.

10 13. A method as claimed in claim 1, wherein an adjusted tracking signal is set to zero when the tracking signal is within a predefined value range, the adjusted tracking signal being supplied to the integrating controller in place of the tracking signal.

15 14. A method as claimed in claim 13, wherein the adjusted tracking signal is set to zero if the absolute value of the tracking signal is less than a predetermined threshold value.

20 15. A method as claimed in claim 1, wherein the integrating controller is operable to not update the integrator if the tracking signal indicates that an update would not be advisable.

25 16. A method as claimed in claim 15, wherein the integrating controller is operable to not update the integrator if the tracking signal indicates that the absolute value of the difference between the estimated value of the first quality measure and the reference value of the first quality measure is larger than a  
30 threshold.

17. A controller for controlling a radio frequency (RF) transmitter, the method comprising:  
an integrating controller operable to produce a  
35 reference value of a first quality measure from a first

---

error signal;

an estimator operable to produce an estimated value of the first quality measure relating to an actual value of the first quality measure; and

5 a tracking unit operable to supply a tracking signal related to the estimated value of the first quality measure and the reference value of a first quality measure to the integrating controller.

10 18. A controller as claimed in claim 17, wherein the first error signal is based on a reference value of a second quality measure and an estimated value of the second quality measure.

15 19. A controller as claimed in claim 18, wherein the first error signal is the difference between the reference value of the second quality measure and the estimated value of the second quality measure.

20 20. A controller as claimed in any one of claims 17 to 19, wherein the second quality measure is one of block error rate (BLER), bit error rate (BER), frame error rate (FER), a number of iterations performed by a decoder, or a value based on reliability of decision  
25 statistics.

21. A controller as claimed in claim 17, wherein the tracking signal is the difference between the reference value of the first quality measure and the estimated  
30 value of the first quality measure.

22. A controller as claimed in any one of claims 17 to 21, wherein the first quality measure is a signal to interference ratio (SIR).

23. A controller as claimed in claim 17, wherein the integrating controller is one of a proportional integrating (PI) controller or a proportional integrating derivative (PID) controller.

24. A controller as claimed in claim 23, wherein the PI controller has the transfer function:

$$SIR_r = e * K + \frac{1}{s} \left( \frac{e * K}{T_i} + \frac{e_s}{T_i} \right)$$

in which  $SIR_r$  is the reference value of the first quality measure,  $e$  is the error in quality measure,  $K$  is a constant,  $e_s$  is the tracking signal and  $T_i$  and  $T_t$  are time constants relating to the integration and tracking unit respectively.

25. A controller as claimed in claim 18, wherein the reference value of the second quality measure is set to produce a desired actual value of the second quality measure of the received signal.

26. A controller as claimed in claim 17, wherein the reference value of the first quality measure is set to produce a desired actual value of the first quality measure of the received signal.

27. A controller as claimed in claim 17, wherein the reference value of the first quality measure is set to produce a command indicative of a desired change in transmission power.

28. A controller as claimed in claim 17, wherein the tracking unit is operable to filter the tracking signal.



29. A controller as claimed in claim 17, wherein the tracking unit is operable to produce an adjusted tracking signal which is set to zero when the tracking signal is within a predefined value range, the adjusted tracking signal being applied in place of the tracking signal.

30. A controller as claimed in claim 29, wherein the tracking unit is operable to set the adjusted tracking signal to zero if the absolute value of the tracking signal is less than a predetermined threshold value.

31. A controller as claimed in claim 17, wherein the integrating controller is operable to not update the integrator if the tracking signal indicates that an update would not be advisable.

32. A controller as claimed in claim 31, wherein the integrating controller is operable to not update the integrator if the tracking signal indicates that the absolute value of the difference between the estimated value of the first quality measure and the reference value of the first quality measure is larger than a threshold.

33. A computer program product comprising code elements which, when run on a computer, cause the computer to operate in accordance with any one of claims 1 to 16.

ABSTRACT

POWER CONTROL IN TELECOMMUNICATIONS NETWORKS

5

10

A radio frequency transmitter is power controlled using a controlling system including an integrating controller, together with an inner and an outer control loop. A tracking signal supplied by the inner loop to the integrating controller of the outer loop is used to avoid windup problems when the transmitted power is saturated.

[Fig.4]

10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

1/2

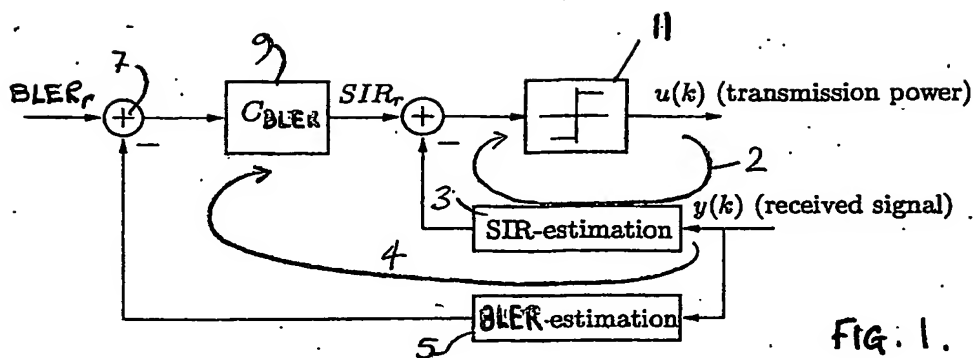


FIG. 1.

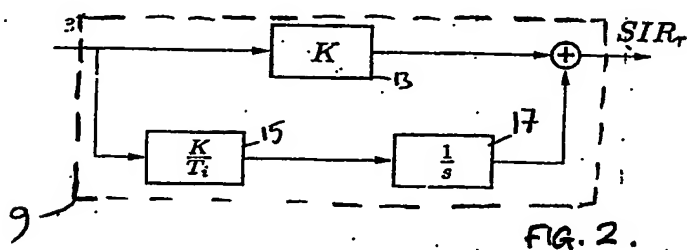


FIG. 2.

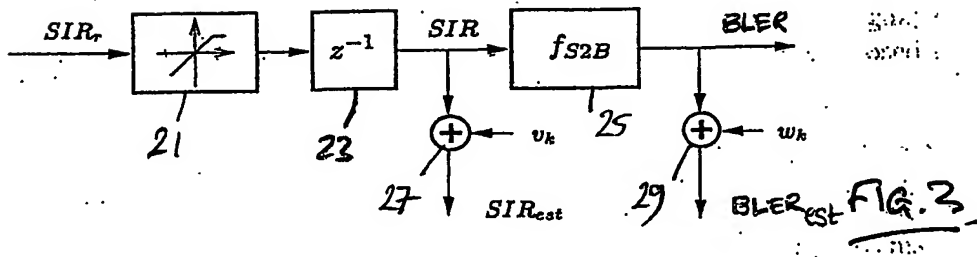


FIG. 3.

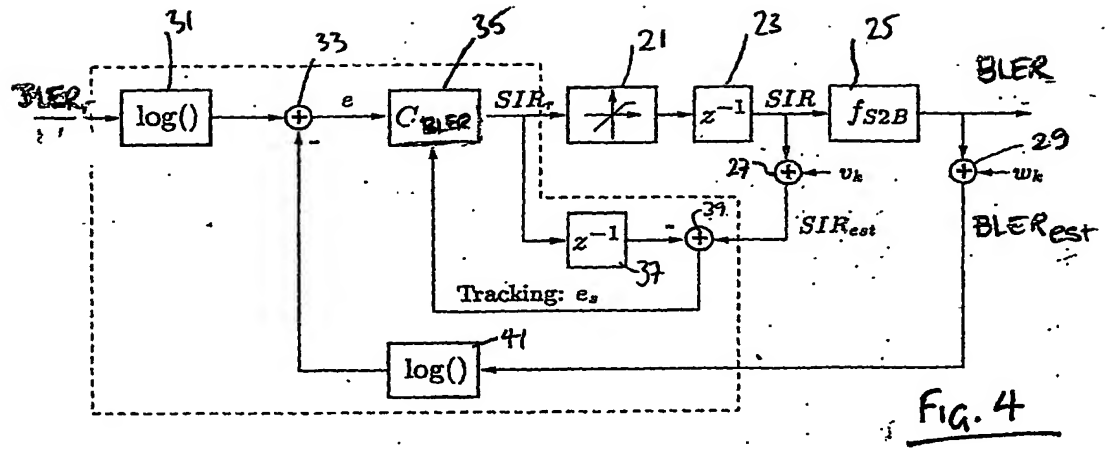


FIG. 4

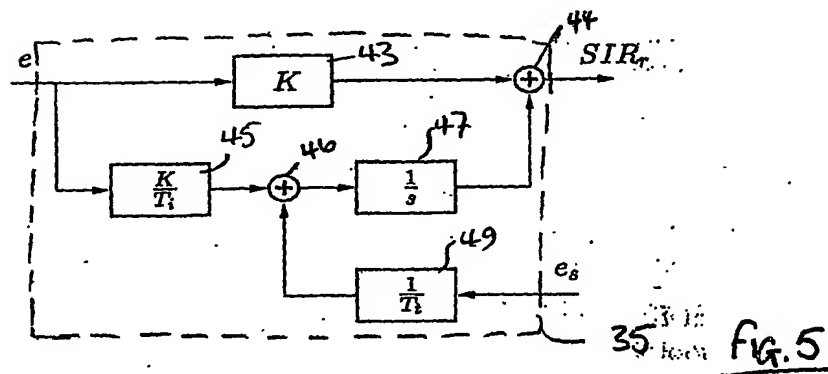


FIG. 5

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**